EXIBIT : H

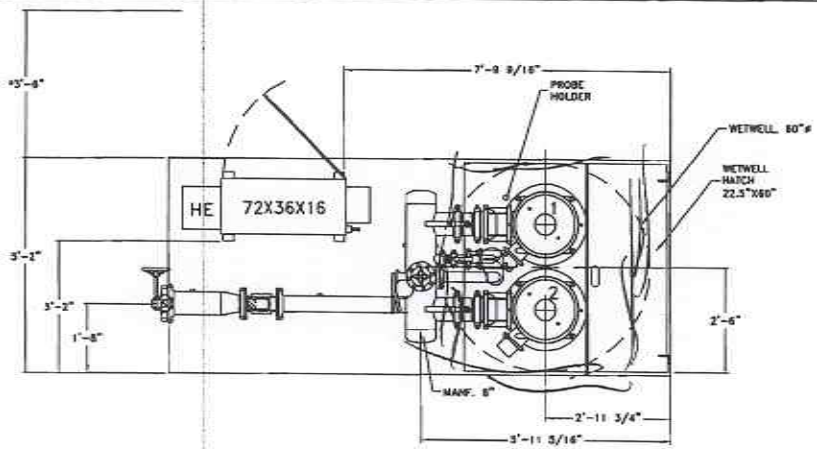

STATION STYLE:	VWTP-900-3-110
TO PRODUCE:	900 GPM @ 110 PSI
HORSEPOWERS:	(PM) 3 (1-2) 40
PUMP DISCHARGE SIZES:	(PM) 2" (1-2) 6"
PUMP ISOLATION VALVES:	(PM) 2" (1-2) 6"
PUMP CHECK VALVE SIZES:	(PM) 2" (1-2) 6"
MAIN DISCONNECT:	200 AMPS
POWER REQUIREMENTS:	127 KVA 460V, 60HZ, 3PH
EXHAUST FAN REQUIREMENTS:	Total to be 1968 CFM

NOTE: 1) *MINIMUM TO ANY OBSTRUCTION REQUIRED BY NATIONAL ELECTRIC CODE.
2) ESTIMATED HEAVIEST LIFT WEIGHT: 4400#

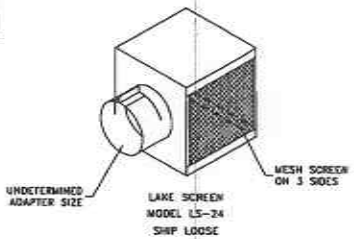

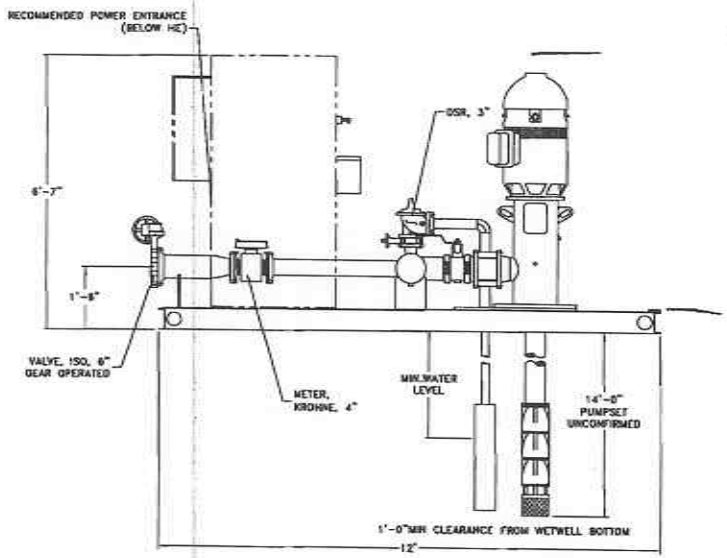

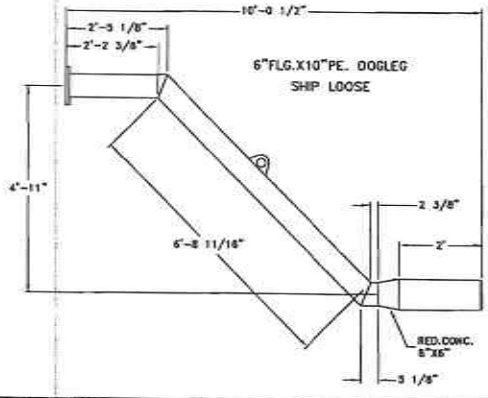

#	REVISION	DATE	BY
1	-	-	-
2	-	-	-
3	-	-	-
4	-	-	-
5	-	-	-
6	-	-	-
7	-	-	-
8	-	-	-
9	-	-	-

FLOWTRONEX
a xylem brand

JOB NUMBER: T015960
JOB NAME: JAMES CONNALLY GOLD COURSE - TX
PROPOSAL NUMBER: SA2L01CD-U05
DRAWN BY: JM
REV: -
SIZE: B
DATE DRAWN: 1/20/12
SHEET #: 1 OF 1